

Minimize the risk. Specify **EXPO WIRE!**




MEDIAN BARRIER REINFORCEMENT

**YOUR
SINGLE SOURCE
FOR WELDED
WIRE FABRIC!**



BIG FOOT

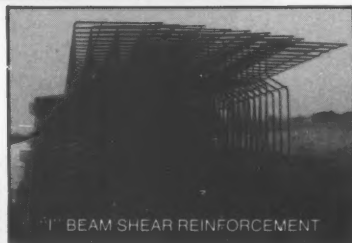

"I" BEAM SHEAR REINFORCEMENT



BRIDGE RAIL (PARAPET)
REINFORCEMENT



PRESTRESS BOX BEAM
SHEAR REINFORCEMENT

For structural slabs on grade, specify Big Foot™...

12 x 12 W 17.25 - W 17.25 in lieu of #4's E.W.

12 x 12 W 2.7 W 2.7 in lieu of 6 x 6 - W 1.4 & W 1.4.

Bent Structural Fabric for: Prestress Box and "I" Beam Shear Reinforcement

... Median Barrier Reinforcement ... Bridge Rail (Parapet) Reinforcement.

When your job requires reinforcement, call "The Innovators - Expo Wire!"


For Temperature Reinforcement (Rolls-Sheets); Pipe Fabric is available.

Expo Wire can perform for you with manufacturing plants in
North Carolina and Texas. Call today!

world of '89
concrete® USA
Booth 955

EXPO WIRE
C O M P A N Y
SUBSIDIARY OF INSTEEL INDUSTRIES, INC.

P.O. Box 1122 • Mt. Airy, NC 27030 • 1-800-334-9504 • FAX: (919) 786-6682



circle 182 on reader service card

CONCRETE CONSTRUCTION SUBJECT INDEX: 1988 continued

Aggregate subgrade, retained on slope with expanded metal, 88.0839

Aggregates

argillite, reactivity tested, 88.1102
coarse, influence D-cracking, 88.0845
decorative
colors available, 88.0571
sources listed, 88.0571
exposure methods, 88.0571
recycled concrete used for, 88.0320
trap rock for floors, 88.0946

Air-entrained concrete, air void system differences, 88.0412

Air entrainment

cocamide DEA produces thicker bubbles, 88.0412
needed with silica fume, superplasticizers? 88.0344
shotcrete, 88.0606

Air forms. See Inflated forms and Formwork, inflated

Alkali aggregate reaction. See also Alkali silica reaction, 88.1103

Alkali silica reaction, 88.1106
possible with pumice and scoria, 88.0354

pumice involvement questioned, 88.1102
with Kansas expanded shale, 88.0618, 88.1103

American Association of State Highway Officials. See AASHTO

Anchors

expansion, 88.0354
tests for strength validation, 88.0354
undercut, 88.0354
wedge, 88.0354

Arch bridges, shotcreted over inflated forms, 88.0385

Architects and artists

Hertz, David, furniture design, 88.0050
Kahn, Albert, 88.0152
Prata, Ralph, 88.1192
Wright, Frank Lloyd, 88.1028

Architectural concrete

board marked finish, how to repair, 88.1096
color with aggregate exposure, 88.0571
desert home has exposed aggregate, 88.1024
elastomeric form liners create mural on floodwall, 88.0518
ribbed form liner details, 88.0034
Usonian Automatic design, construction, 88.1028

Architectural design

history
factories framed in concrete, 88.0152
influence of structural concrete, 88.0076

Argillite, aggregate, reactivity tested, 88.1102

Associations

British Cement Association formed, 88.0254
fibrous concrete group organizes, 88.0712
Georgia concrete contractors organize, 88.0805
international list, 88.1223
repair contractors organize, 88.0516, 88.0709

Automobile plants, framed in concrete, history, 88.0152

B

Ball valve concrete pumps, features and operation, 88.0145

Basements

benefits in home marketing, 88.0467
formwork unloaded by crane, saves labor, 88.0930
wood, deficiencies, 88.0467

Bathroom, furniture and finish in concrete, 88.0953

Beams, curved, precast on site, 88.0921

(more)

NORCEM

CORROCEM™

SILICA FUME ADMIXTURES

CORROCEM COMPACTED SILICA FUME NOW AVAILABLE IN DRY BULK FORM

Norcem Concrete Products is the exclusive manufacturer and supplier of bulk dry compacted silica fume in the United States. CORROCEM compacted silica fume has all of the same technical performance criteria as ordinary silica fume, but at over twice the density (35 to 40 lbs/FP), with material handling qualities superior to that of bulk cement. CORROCEM silica fume additives are a family of pozzolanic admixtures which combine with the lime in fresh concrete to produce a new binder matrix which is chemically resistant and has a denser microscopic pore structure.

For ready mix applications CORROCEM compacted silica fume can give you quality corrosion resistant concrete for: parking decks, high strength projects, bridges and marine structures. All of this can be accomplished from normal automated cement batching systems.

For precast applications CORROCEM compacted silica fume can provide high early and high ultimate compressive strengths. CORROCEM compacted silica fume can also significantly reduce steam curing times, and provide substantial savings on heating costs and rapid turnover of forms.

For shotcrete applications, wet or dry, CORROCEM compacted silica fume can provide high strength, with significantly less rebound loss after thicker applications.

The addition of CORROCEM silica fume admixtures will produce concrete with superior performance for the following characteristics:

- * Extremely low permeability to chloride ion intrusion, prevents rebar corrosion.
- * High ultimate compressive strengths, 8000-17000 psi, with variable dosages of silica fume.
- * High early strengths (without steam curing): 4500 psi in 24 hours, 6000 psi at 3 days, (with steam curing these strengths can be increased 50 to 100%).
- * Resistance to chemical attack from: chlorides, nitrates, acids and sulfates.
- * Increased abrasion resistance and durability.
- * Increased freeze/thaw durability.

The use of CORROCEM compacted silica fume completely stops rebar corrosion, protecting any type of embedded steel. This is because CORROCEM compacted silica fume concrete has low chloride permeability and extremely high electrical resistivity which does not allow corrosion current (measured by Rapid Chloride Permeability Tests) to flow between the embedded steel members. Concrete utilizing CORROCEM compacted silica fume has achieved Rapid Chloride Permeability data of 190 coulombs for field cylinder samples (11% CORROCEM by weight of cement). This is superior technical performance compared to silica fume water slurries, due to the elimination of particle size agglomeration in water.

Compacted silica fume is virtually dustless, flows readily (better than bulk cement) and can be stored in ordinary cement silos and transported in bulk cement tankers. It can be moved into cement storage silos by: pneumatic lines, bucket elevator or screw conveyor.

CORROCEM compacted silica fume can be shipped via standard cement tankers that hold 23 to 25 tons or in "Super Sacks", large 70 cubic foot polypropylene bags which can hold approximately one ton of compacted silica fume. The double density allows bulk handling methods and also helps to reduce shipping costs as compared to ordinary silica fume and silica fume water slurries. CORROCEM silica fume admixtures are also available in 55 pound bags for smaller projects and field use.

Norcem will provide technical assistance with mix designs, field support and material handling systems. Norcem can also supply a compatible line of superplasticizers which make the plant and field use of silica fume concrete simple and practical.

The addition of CORROCEM compacted silica fume will allow you to produce concrete products stronger and more durable, with many performance characteristics which are normally unattainable.

Norcem Concrete Products Inc.

DIVISION OF A/S SCANCEN — THE NORWEGIAN AND SWEDISH CEMENT INDUSTRY

52-00 Second Street • P.O. Box 1348 • Long Island City, N.Y. 11101
Telex: 224379-CCC • Fax: (516) 724-8045
Long Island Office: (516) 724-8639 • New York Office: (718) 392-4500

world of '89
concrete™ USA
Booth 178



circle 353 on reader service card

pave up... to Miller Formless Quality



Above — M-9000 Multi Directional Paver, heavyweight performance — paving widths 8 feet to 18 feet, optional 27 feet.

Right — The M-8100 is a bi-directional sidemount paver and mid-sized half-width paving system. In the sidemount mode the M-8100 slipforms curb & gutter, sidewalk, 60" barrier wall, bridge parapet and 12' sidemount paving applications. The M-8100 can be used as a right or left hand sidemount to go with traffic flow. As a half-width slipform paver the M-8100 can slipform 16 foot paving applications with integral curb.



Above — The M-1000 Curb & Gutter Machine, high productivity combined with set up ease best describes this fully automated system when slipforming curb & gutter and sidewalk applications.



circle 241 on reader service card

MILLER FORMLESS SYSTEMS

Quality, the best advantage to work with.



©MILLER FORMLESS CO., INC. 1987

MILLER FORMLESS CO., INC., 1805 N. DOT ST., McHENRY, IL 60050
800-435-6150 In IL Call Collect 815-385-7700

CONCRETE CONSTRUCTION SUBJECT INDEX: 1988 continued

Bering Strait, bridge construction proposed, **88.0587**

Bidding, compared with negotiated work, **88.0590**

Blinshell forming method, **88.0407**

Bleeding

behavior described, **88.0935**

excessive in walls, causes and cures, **88.0935**

flatwork, problems and remedies, **88.0935**

Board marked concrete, repair of surface defects, **88.1096**

Bond issue, pavement funding, favors concrete, **88.0501**

Bonding, concrete repairs to old concrete, **88.0676**

Brandywine Shoal lighthouse, rehabilitation with concrete, **88.0655**

Break-even analysis, aids in cost control, **88.0180**

Bridge decks

corrosion resistant overlays, **88.0110**

latex modified grout overlay, skid resistance, **88.0362**

polymer concrete overlays, **88.0362**
repair using debris catcher, **88.0426**
waterproofing membrane stops corrosion, **88.0268**

Bridges

aesthetics in design considerations, **88.0023**

bascule, counterweight repair with shotcrete, **88.0330**

cable-stayed box girder, proposed for Bering Strait, **88.0587**

Intercontinental Peace Bridge proposed, **88.0587**

pedestrian, wins CRSI award, **88.0710**
short span, shotcrete over inflated forms, **88.0385**

Bulkhead forms, expanded metal, **88.0214**

Business organization

accounts receivable management, **88.0038**

break-even analysis helps control cost, **88.0180**

cash flow management, **88.0038**

computers for estimating and cost control, **88.0028**

documentation to support firings, **88.0795**

estimating, scheduling, cost control: one system, **88.0170**

inventory and debt management, **88.0034**

marketing subcontractor services, **88.0104**

mediation to settle contract disputes, **88.0190**

negotiated work compared with bidding, **88.0590**

parking lot paving company, **88.0459**

planning for disaster, **88.0204**

safety programs, motivating workers, **88.0683**

Buy-sell agreement, planned transfer of ownership, **88.0886**

Buyers' guide, product and source listings, **88.1109**

C

Cable-stayed bridges

epoxy coated cable for, **88.0259**

Sunshine Skyway Bridge, **88.0023**

Caisson construction

foundation for mill scale pit, **88.0107**

repairs at Brandywine Shoal lighthouse, **88.0659**

Calcium chloride, flake form, how to use, **88.1096**

Cash flow, management essential to business, **88.0034**

(more)

CONCRETE CONSTRUCTION / FEBRUARY 1989

With Crete-Lease™ "Blemish-Free" Release Agents

See us at
World of
Concrete
#1065

PICK YOUR FINISH

Before You Pour

Select the quality of surface finish you want before you pour... with Crete-Lease release agents.

Crete-Lease 880™
For example, if you want a Class 1 unblemished concrete surface, spray your forms and form liners with an ultra-thin film of Crete-Lease 880 before placing the concrete.

You'll get a high visual impact finish. Produces smoother, more beautiful architectural surfaces every time. Bugholes minimized or eliminated... works especially well with superplasticized concrete. Easy stripping, clean forms and high coverage. Won't stain. Won't cause paint to peel nor caulking to leak. Other Crete-Lease formulas available to give you the quality of surface finish you want.

FREE BROCHURE
"How to Eliminate Bugholes"
A photographic guide to picture-perfect concrete. Illustrates six classes of concrete appearances. Gives you visual specifications to consistently produce the finished concrete you want. Call or write:

FOR CONCRETE RESULTS

Cresset™

Cresset Chemical Company
One Cresset Center/Weaton, OH 43569
1-800-367-2020/419-669-2041

*CCS = Cresset Concrete Systems

1989 Cresset Chemical Co.

circle 166 on reader service card

TEST THE BEST



Magna invites you to try the finest lines of hammer drill accessories available anywhere.

Hammer bits with shanks of annealed steel. Shot-peened for torque and twist protection. Fluted, for faster drilling and better dust extraction. And tipped with top grade tungsten carbide. To make piercing concrete and stone easy.

Hammer core and hollow core bits for drilling wide diameter holes in virtually any masonry material. Precision crafted tools with perfectly placed, clean-cutting carbide tips. To give you better finished work and longer service.

Masonry chisels and steel points. For scaling, for chipping, for roughing, for channeling, and for more. All made of high-grade, drop-forged steel with hardened work areas that make your work easy.

And Magna's new BX5. With five cutting edges of tough H-L grade carbide and a double spiral twist design, for fast dust disposal. A bit that centers precisely. That cuts down on drill-sound. That cuts down on vibration. That cuts perfect circles in masonry.

Try Magna hammer drill accessories. Test the best. You'll like how they bring out your best.

circle 112 on reader service card

world of '89
concrete USA
Booth 104

Magna
1001 West Park Road
Elizabethtown, KY 42701
502-737-3311

MAGNA
Tough tools for tough jobs

DIVISION OF VERMONT AMERICAN CORPORATION

Cathodic protection

anode mesh is basis of new system, **88.0340**
how it works, **88.0340**

Cement, mill test report explained, **88.0951**

Cement dust, combats acid rain, **88.0030**

Chimney, lining cast around inflated form, **88.0395**

Chloride ion

limits set by ACI 318, **88.0420**
when to test for, **88.0420**

City Spire

height 813.5 ft approved, **88.0707**
high-rise in New York at 810 feet, **88.0486**

Coatings, epoxy over shotcrete, **88.0018**

Cocamide DEA, entrains thicker-walled bubbles, **88.0412**

Cold weather concreting

curing needs, **88.0743**
insulating materials, **88.1036**

Color

aggregate exposure for, **88.0571**
aggregate sources for, **88.0571**
chemical stains used for, **88.0853**
dry shake hardeners, when and how to use, **88.0853**
integral, when to use, **88.0853**
marketing aid in landscape work, **88.0853**
matching in repair materials, **88.1096**

Color variability, causes on formed surfaces, **88.1038**

Colored concrete

curing methods, **88.0743**
finishing techniques change appearance, **88.0853**
methods of producing, **88.0853**

Compressive strength

affected by vibration, **88.0563**
cylinder size affects test, **88.0034**
high early, latex modified concrete, **88.0839**
test reports, information required by ASTM, **88.0939**
testing errors warned against, **88.0939**

Computers

aid half-cell corrosion test, **88.0757**
design pavements to AASHTO standards, **88.1092**
estimating and cost control, **88.0028**
formwork design using, **88.0696**

Concrete Construction magazine

article index 1988, **88.1223**
subject index 1987, **88.0956**

Construction joints

buildings
design requirements for, **88.0577**
form details, **88.0577**
shear wall needs are special, **88.0577**
where to install, **88.0577**

Construction layout. See Layout

Construction loads, OSHA regulations, **88.1079**

Contract relationships

buy-sell agreement by shareholders, **88.0866**
negotiating instead of bidding, **88.0590**
specialty contractors, choosing and paying, **88.0870**

Cooling, mass concrete, **88.1032**

Cores, length-diameter ratio affects strength, **88.0034**

Corrosion, unbonded tendons, proper details will prevent, **88.0668**

Corrosion (reinforcement)

bridge deck, inhibited by waterproofing, **88.0268**

(more)



MAKE EVERY BREAK COUNT

Brainard-Kilman's C-140 Concrete Compression Machine makes all your cylinder breaks count. The C-140, featuring MAX™ electronics, virtually eliminates the chance for human error by fully documenting test results. Sample number, date, time and correct load pacing are all recorded and printed.

Standard features include:

- 440,000 lb capacity
- Console, waist high platens & fragment guards
- Heavy duty steel frame
- Bottom load application for precise applied load measurement

Meets ASTM C 39, E 4, AASHTO T 22

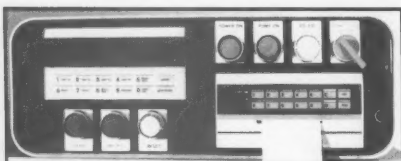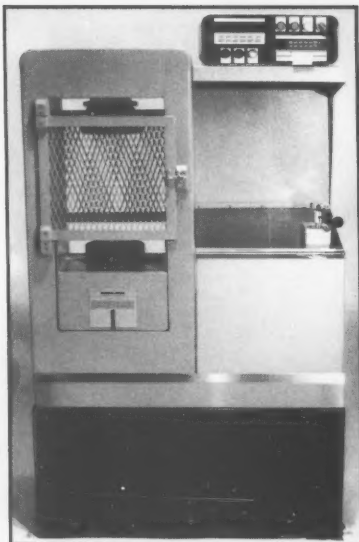

- Digital Load Pacing to help control load rate
- RS232 computer output
- Easy-to-use push button controls

MAX™ Electronic System includes:

- Digital Readout & Printer
- Unique "Peak Hold"
- 10,000 psi Pressure Transducer

world of '89
concrete USA
Booth 1504

BRAINARD-KILMAN


2175 West Park Court • P.O. Box 1959 • Stone Mountain, GA 30086
(404)469-2720 • 1-800-241-9468

Chicago GeoStore (312)354-9272	Orlando GeoStore (407)648-9690	Houston GeoStore (713)561-9639	Raleigh GeoStore (919)790-9391	St. Louis GeoStore (314)928-6000
--------------------------------------	--------------------------------------	--------------------------------------	--------------------------------------	--

circle 147 on reader service card

O P T I C A L • L A S E R

David White Instruments. Nobody else has it all.

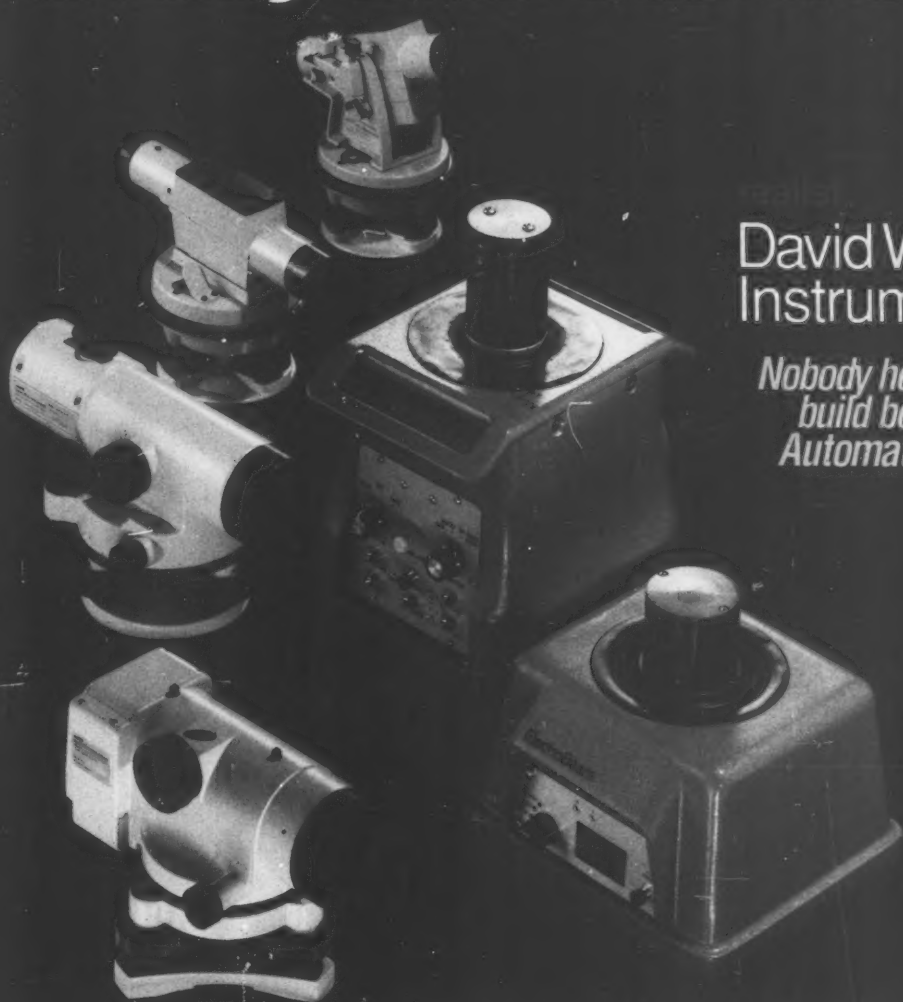


David White
Instruments

*Nobody helps you
build better.
Automatically.*

FREE Tripod

with the purchase of any automatic
optical or laser instrument
before May 31, 1989.



Nobody but David White offers you a full line of precision-built laser and optical instruments. And there's never been a better time to buy one of these precision productivity tools.

Think of them as a full line of money machines.

The time you save with a David White automatic instrument is money in the bank. Automatic level compensation lets you level faster. More accurately. Without a lot of finicky adjustments. Precision compensators automatically establish a level line of sight, then hold it accurately, even in areas of on-the-job vibration.

The David White automatics are loaded with easy-to-use, time-saving features. Optical or laser, they're just like extra hands on the job.

circle 413 on reader service card

We'll even sweeten the deal with a FREE tripod.

Buy a David White optical or laser automatic level by May 31, 1989, and we'll include a rugged, reliable David White extension-leg tripod at no additional cost. Purchase validation required. See your David White dealer for details.

The free tripod is a limited-time offer. But when you go with David White, the extra productivity is always free. Automatically.

Write David White or return the publication inquiry card for more information, a **FREE Tripod certificate**, and a **FREE Keep On Buildin' America bumper sticker**.



David White Instruments • P.O. Box 67 • Menomonie Falls, WI 53051
See us at World of Concrete booth nos. 4255 and 1866

"You're not going to outproduce these machines. Period." -Mike Vallencourt

When Mike Vallencourt bids on projects, he has an edge...the Puckett Bros. edge. The president of Vallencourt Construction says it flat out: "Ever since I bought a Puckett Bros. 510D Grader and SF820D Slipform Concrete Curber, I've been able to expand operations."



"The SF820D Curber had given us a completely new source of revenue. Before when we paved a parking lot, we had to sub out the curb work to other contractors. That gave us headaches in both profitability and scheduling. Not any more. These two machines allow us to compete in terms of price and production with anyone. With our curber we can put out as much lineal feet of curb as any larger more expensive curber...with less manual work. This means we can get in, get the job done and move on to the next one while the competition is still finishing up massive hand work."

"The 510D Grader and SF820D Curber work together as a team. Their versatility allows us to tackle all kinds of jobs — from 60,000 lineal feet of subdivision curb to 78,000 square feet of concrete golf cart paths."



A 10-foot moldboard, rear-mount rippers and front-end loader are standard features on the economical, multipurpose 510D PB Grader. With the optional vibratory plate compactor, the 510D can handle total site preparation. And Mike Vallencourt points out, "We can both grade and compact subgrade with it. And the stringline sensors let us prepare the total surface on-grade."

The maneuverable SF820D Slipform Concrete Curber boasts features you would only expect on larger curbers. With a 22 inch vertical lift and a unique conveyor design the SF820D

can get you close to obstacles and work in tight areas. And slipforming a radius of 2½ feet is a snap! "A small crew can deliver high-quality curb in mass quantities."

For more information on Puckett Bros. "job proven" equipment and the name of your nearest dealer call:

1-800-PUCKETT

world of '89
concrete USA
Booth 3749



PUCKETT BROS. MFG. CO., INC.

3870 Highway 124, Lithonia, GA 30058

circle 368 on reader service card

CONCRETE CONSTRUCTION SUBJECT INDEX: 1988 continued

cathodic protection, anode mesh system, **88.0340**
computerized detection, half-cell method, **88.0757**
half-cell detection methods, **88.0757**
prevention methods enumerated, **88.0110**
testing services for, **88.0056**

Cost comparisons

concrete vs. steel, high-rise buildings, **88.0453**
pavements on life cycle basis, **88.0501**

Cost control

break-even analysis used in pricing, **88.0180**
buildings, standardized modular tilt-up, **88.0508**
computer improves system, **88.0028**
part of management information system, **88.0170**

Cracking

causes and remedies explained, **88.0312**
D-type, causes and prevention, **88.0845**
direction of different types, **88.0792**
membrane curing film, **88.0348**
parking deck slabs, due to shear weakness, **88.0924**
plastic shrinkage, latex modified overlay, **88.0672**
residential flatwork problems, **88.0770**
standards for acceptability, **88.0312**
types and causes, **88.0312**
what kind is harmful? **88.0312**

Crane

mobile, lifting capacity determination, **88.0524**
roof-mounted, installs precast facade, **88.0699**
safe operation near power lines, **88.0416**
tilt-up work, tips for cutting cost, **88.0475**
unloads basement formwork, **88.0930**

Culverts, shotcreted over inflated forms, **88.0385**

Curing

affects strength/durability, **88.0743**
cold weather methods, **88.1036**
cold weather needs, **88.0743**
colored concrete, **88.0743**
hot weather needs, **88.0743**
liquid membrane compounds, **88.0743**
methods and materials reviewed, **88.0743**
temperature extremes affect strength, **88.0743**

Curing blankets, closed cell plastic foam, **88.1036**

Curling

slab on grade
causes and remedies, **88.0424**, **88.0510**

(more)

WE GIVE YOU A SUPER CHOICE.



**world of '89
concrete USA**
Booth 4055

Until now, if you wanted a superplasticizer you had to buy the one your admixture supplier happened to sell.

But what if you wanted a naphthalene-based super but your supplier sold only a melamine-based super? Or the other way around?

You were stuck. But now all that's changed.

Gifford-Hill offers you the best choice in supers: Naphthalene-based PSI® Super or Melamine-based Melment.®

And equally important, we have the technical expertise to guide you in choosing the best one for your particular applications.

For more information on admixtures, non-shrink grouts, sealers or hardeners, just contact your Gifford-Hill Representative, or call our Headquarters at 214/754-5500.

We give you a super choice. And super service, too.



MIX WITH THE RIGHT COMPANY.®

Gifford-Hill & Company, Inc., Box 190999, Dallas, TX 75219-0999, 214/754-5500
Charlotte Dallas Salt Lake Chicago Memphis

circle 196 on reader service card

PEARLS FOR ANY OCCASION

TO PEARL ABRASIVE
GET GENUINE PEARLS - ACCEPT NO IMITATIONS.

We have what you need, when you need it. The most complete line of diamond blades and wheels for any construction need. All sizes, all grades, for wet and dry cutting and grinding. Products you can trust, from the originators of the SD "Ripple" blade.

Need Abrasives, too? Ask for a Pearl.

Each of our five branches has a fully stocked warehouse. So, you can count on immediate delivery.

LOS ANGELES
HEADQUARTERS
(213) 773-1625
(714) 978-3280
FAX 213-928-3857

CHICAGO BRANCH
(312) 595-1030
FAX 312-595-7523

GEORGIA BRANCH
(404) 621-0601
FAX 404-621-0660

(800) 421-3519
OUTSIDE CALIFORNIA

SAN JOSE BRANCH
(408) 436-1177
FAX 408-436-8170

NEW JERSEY BRANCH
(201) 939-3335
FAX 201-568-9215

CALL ANY BRANCH FOR YOUR LOCAL DISTRIBUTOR.

Join us at WOC '89 Booth #4844

circle 360 on reader service card

CONCRETE CONSTRUCTION

SUBJECT INDEX: 1988 *continued*

Curved walls, forming methods, **88.0007**

Cutting concrete

joints sawed minutes after finishing,
88.0336
water jet method, **88.0806**

D

D-cracking, causes and prevention,
88.0845

Debris catcher, used in bridge deck
repair, **88.0426**

Delcra, recommendations for safe use,
88.0858

Dictionaries. See also Terminology
construction terms, NAWIC volume,
88.0429

Dome construction

geodesic, polystyrene and concrete,
88.1018
inflated forms for home modules,
88.0389
inflated forms lift wet concrete/steel,
88.0407
inflated forms with dry mix between
fabric layers, **88.0405**
inflated forms with foam and shotcrete,
88.0391
post-tensioned, shotcrete over inflated
form, **88.0389**

Dome pan forms, GFRP, stadium ramp,
88.1007

Dowel bars, epoxied in for pavement
repair, **88.0198**

Drilling

dust removal by vacuum, **88.0527**
dust removal during, **88.0224**

Driveways

basic design/construction requirements,
88.0858
color/texture aid residential marketing,
88.0858
colored concrete hides stains, **88.0853**
grass-concrete paving, construction
method, **88.0863**

Dry shake toppings

color hardeners, how to use, **88.0853**
trap rock hardener, **88.0946**

Duck, big one of concrete, Long Island,
1931, **88.0620**

Durability


effect of microsilica in mix, **88.0706**
freeze-thaw resistance, shotcrete,
88.0606
high strength concrete, air entrainment
vs. other admixtures, **88.0344**
wastewater, acid attacks concrete,
88.0673

E

Earth-sheltered construction, inflated
forms for dome modules, **88.0399**

(more)

OUR HIGH QUALITY STANDARDS PUT US AHEAD.

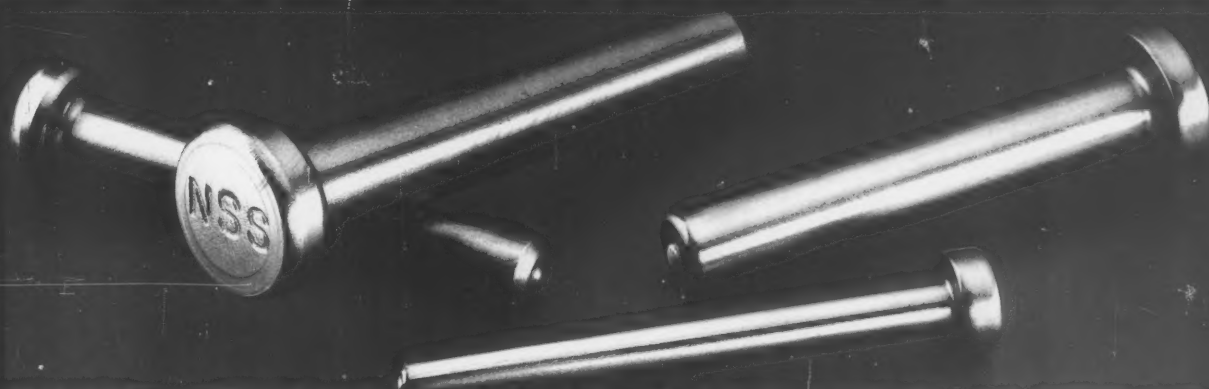

OUR LOW PRICES PUT YOU AHEAD.

- Fully approved and certified
- High standards of quality
- Quality service
- Competitive pricing

Call **NSS Industries** for your
DEFORMED BAR ANCHOR
and HEADED CONCRETE ANCHOR
requirements.



world of '89
concrete^{USA}
Booth 3783

NSS Industries • 9075 General Drive • Plymouth, Michigan • (800) 221-5126 • (313) 459-9500 • FAX (313) 459-4830

circle 354 on reader service card



Earthquakes, California 1987, **88.0246**

Enclosures, temporary, wire mesh encased in plastic, **88.0220**

Epoxies, value in concrete repair questioned, **88.0424**

Epoxy coatings, over shotcrete repair, **88.0018**

Epoxy joint sealants, industrial floors, **88.0749**, **88.0783**

Erection procedures, precast concrete girders roll into place, **88.0176**

Estimating
computer improves accuracy, **88.0028**
part of management information system, **88.0170**

Evaporation, prediction of, to avoid plastic cracking, **88.0672**

Expanded metal
bulkhead form, **88.0214**
retains aggregate base for slope paving, **88.0839**

Exposed aggregate
color choices available, **88.0571**
methods compared, **88.0571**
mix design for, **88.0215**
surface retarder on vertical casting, **88.1024**

F

Fabric forms, hold dry mix over inflated membrane, **88.0405**

Failures, L'Ambiance Plaza lift slab, tendon anchorage satisfactory, **88.0974**

Fall protection, worker safety with formwork, **88.0303**

Falling objects, hazard in formwork operations, **88.0303**

Fast track overlays, performance evaluated, **88.0194**

Finishing, lightweight aggregate concrete, air screed, **88.0492**

Fire insurance, cost reduced with concrete, **88.0481**

Fire protection
code requirements summarized, **88.0712**
sprinkler advantages vs. limitations, **88.0481**

Fire resistance, concrete's advantage in meeting codes, **88.0481**

Flatwork
bleeding problems, **88.0935**
color enhances marketability, **88.0853**

colored, construction practices, **88.0853**
decorative finishes for, **88.0846**
grass/concrete paving, construction method, **88.0863**

rain damage to fresh concrete, **88.0349**
residential, recurring problems, **88.0770**

Floodwalls, mural cast in place, Morgan City, Louisiana, **88.0518**

Floor construction
jointing practices, industrial service, **88.0749**
joints filled with epoxy, **88.0783**
trap rock hardeners and toppings, **88.0946**

Floor slabs
industrial and commercial, subgrade preparation for, **88.0137**
rain damage problems, **88.0349**
repair materials and methods, **88.0097**

Fly ash
detection in hardened concrete, **88.0696**
expansion problems with, **88.0618**, **88.1103**

Flying forms, beam tables on shoring, spiral ramp, **88.1007**


Footings, cast around base of precast wall, **88.0319**

(more)

MAYCO LST Series of Mid-Range Concrete Pumps

QUALITY AND RELIABILITY
DON'T HAVE TO COST MORE
SENSIBLY PRICED—LST 60S

- A long-stroke concrete pump designed to place concrete mixes containing 1½" aggregate
- Volume outputs ranging from 0 up to 60+ cubic yards per hour
- Versatile—pumps ½" minus pea gravel mixes
- Only two wearing parts in concrete valve—a wear ring and wear plate
- Long hose jobs . . . tougher mixes . . . higher volume that a larger hydraulic pump offers with pressure capabilities in excess of 900 psi

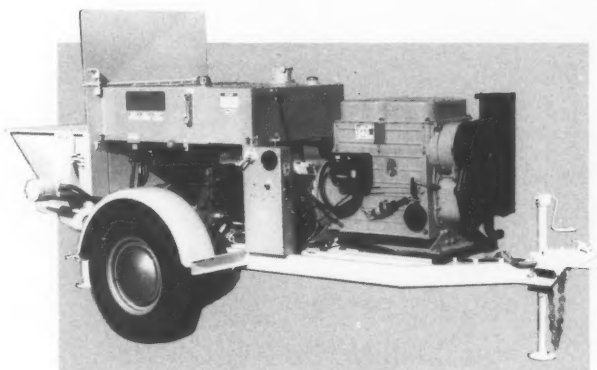

Featuring MAYCO's exclusive **Balanced Hydraulics™**

In addition to placing concrete for slabs and decks, this versatile pump handles many applications including shotcreting, masonry block fill, sand backfill, chemical and organic slurries, oil field drilling cuttings and compaction grouting.

world of '89
concrete USA
Booth 377

OTHER MAYCO PUMPS:
C30-HD small line concrete pump
LST 30/60S high volume pea gravel pump
PF series of plaster and fireproofing pumps

Ask about our program for starting a concrete pumping service. A profitable way to diversify. Write or call today for the name of your local Mayco pump distributor.

MAYCO PUMP CORP.

4640 Sperry St., Los Angeles, CA 90039 • (818) 507-3900
Telex No. 292479

circle 234 on reader service card

Bonsal Just Removed Another Barrier To Saving Money.



**WET
CONCRETE**

world of '89
concrete USA
Booth 3668

Announcing A Revolutionary Self-Leveling Wear Topping From Bonsal.



The wear-surfaced product so advanced, it can be opened to light traffic just four hours after application. Because, it's the first true wear-surfaced floor topping for both exterior and interior use that needs no additional finishing. No overcoating sealers or protective coatings of any kind.

So, you can imagine how much money you can save in labor costs and down time. Not to mention materials. You simply apply by pump or pour.

For new construction, you eliminate the cost of finishing work prior to tile or other flooring. On the other hand, you can also slash your down time for renovation and repair projects.

Need proof? We're ready with complete details on successful and proven applications, from residential construction to parking decks. Call or write W. R. Bonsal Company, P.O. Box 241148, Charlotte, NC 28224. 1-800-334-0784. In North Carolina (704) 525-1621.


Self-Leveling Wear Topping from Bonsal. Our newest way yet to keep your project moving.



**1st in
Forming
since 1909**



**Steel Forms for
Concrete Construction**



**Curb &
Gutter**

world of '89
concrete USA
Booth 972

**SPEED
SCREED**

**Concrete
Finishing
Machines**

**Metal
Forms**

Call or write for
product literature

Corporation
3334 North Booth Street
Milwaukee, Wisconsin 53212
Phone (414) 964-4550

circle 118 on reader service card

CONCRETE CONSTRUCTION SUBJECT INDEX: 1998 continued

Form liners

butt joints to be avoided, **88.0034**
elastomeric, create floodwall mural,
88.0518
ribs limit aggregate size, **88.0034**

Form materials, wire mesh encased in
plastic, **88.0220**

Form stripping, safety precautions,
88.0303

Formwork

assembly line casting, barrel shell roofs,
88.0152
basement construction, crane unloads
panels in hole, **88.0930**
British *Guide to Good Practice*
published, **88.0228**
bulkhead, expanded metal, **88.0214**
control joint details for buildings,
88.0577
curved walls, methods compared,
88.0007
design aided by computers, **88.0696**,
88.1046
dome pan, spiral ramp, **88.1007**
expanded metal backform, slope
paving, **88.0839**
high-rise construction, tips for economy,
88.0453

Inflated

design and fabrication, **88.0403**
lifts wet concrete and steel, **88.0407**

inflated cylinder, culvert and bridge
arches, **88.0385**
inflated for chimney lining, **88.0395**
inflated for domes, **88.0389**, **88.0391**,
88.0405, **88.0407**
residential, **88.0399**
molds for ornamental concrete
products, **88.0351**

plywood room modules, stay in place,
88.0708
precast panels stay in place for walls,
88.0268
preplaced aggregate concrete repairs,
grout-tight, **88.0643**
safety for workers, **88.0303**
spiral ramps, Dolphins' Stadium,
88.1007
stripping time, OSHA requirements,
88.1079
till-up panel edges for stack casting,
88.0755

Foundations, mat concrete cooled to
control cracking, **88.1032**

Freeze-thaw damage

high strength concrete, effect of silica
fume, superplasticizers, **88.0344**
shotcrete resistance to, **88.0606**

Furniture

Hertz designs in concrete, **88.0050**
modular precast in office atrium,
88.0848

(more)

Gyp-Crete 2000™ Floor Underlayment

**Because Not All Concrete
Floors Are Created Level.**

Maybe the concrete curled or the form work sagged. Or maybe the surface
just wasn't smooth enough to accept a finished floor good.

To anyone who works with concrete, the problem of a rough, uneven, out-
of-level floor is all too familiar.

Luckily, there's a solution.

Gyp-Crete 2000 pours over concrete and corrects a multitude of sins. It
smooths rough spots without dusty grinding. It dries without shrinkage
cracks, accepting foot traffic within 90 minutes of application. And at depths
of 3/8 inch to 3 inches, Gyp-Crete 2000 can create a smooth, flat floor without
time-consuming hand troweling.

Best of all, a Gyp-Crete 2000 crew can apply up to 30,000 square feet per
day at a fraction of the cost of other cementitious underlayments.

For more information, contact:

Gyp-Crete Corporation
920 Hamel Road, Hamel, MN 55340
(612) 478-6072

world of '89
concrete USA
Booth 3474



circle 200 on reader service card

STEP INTO THE ELECTRONIC AGE. AFFORDABLY.

Now work faster, work smarter... with the industry's finest value in electronic surveying instruments — the DT5A and DT5 by Lietz. These easy-to-use digital transits make quick work of foundation staking, lot and loan surveys — their quality and convenience can help make your business more profitable.

- ▶ Large, liquid crystal displays are easy to read in bright sun, backlit for low light
- ▶ Digital angle display for superior accuracy
- ▶ Time-saving optical plummet
- ▶ Superior optics with 30X telescope
- ▶ Lightweight durability



LIETZ DT5A:

Features two-line LCD display and soft-touch function keys. Perfect for the contractor or construction layout. Perfect back-up for the part-time crew.

Don't wait any longer to give yourself the electronic advantage — call today for full details and a personal demonstration.

LIETZ DT5:

Features dual, two-line LCD displays and soft-touch function keys on both front and back of instrument. Versatile and fast.



1-800-255-3913
(Ext. 0)



© 1988 The Lietz Company

Most Lietz instruments and equipment available under GSA contract number GSDF 93527.

**world of '89
concrete USA**
Booth 1710

circle 223 on reader service card

G

- Garden, concrete rocks and railings for, 88.0848
- Geodesic dome, residence of polystyrene and concrete, 88.1018
- Glass-fiber-reinforced concrete restores historic facade, Oregon, 88.0196
- rocks precast for jungle pool, 88.0693
- Grass, grows in formed voids of pavements, 88.0863

Grinding, when to start, 88.0695

Grout

- bonds repairs to old concrete, 88.0676
- low viscosity, cement based, 88.0971
- mix and equipment for slabjacking, 88.0651
- preplaced aggregate concrete needs, 88.0643

H

Half-cell corrosion tests, computer-aided device, 88.0757

Hardness, achieving on floor surfaces, 88.0946

Helicopter, places ready mix concrete by bucket, 88.0344

Hertz, David, furniture designs in concrete, 88.0050

High early strength concrete, latex modified, mixing and placing, 88.0831

High-rise construction

- City Spire in New York, record 810 feet, 88.0486
- concrete vs. steel, 88.0453
- cost advantage for concrete, 88.0453
- hotel record at Raffles City, 88.0886
- new record in 1990, Chicago, 88.0429

High strength concrete

- freeze-thaw damage resistance, which admixtures? 88.0344
- silica fume plus superplasticizer, durability, 88.0344

Highways, trust fund money should be used, 88.0605

History

- Hofmann Tower, Lyons, Illinois, 88.0208
- Hoover Dam story, 88.0890
- industrial architecture of Albert Kahn, 88.0152
- lighthouse at Brandywine Shoal, rehabilitation in concrete, 88.0659
- Long Island duck, concreted in 1931, 88.0620
- pavement pattern stamped in 1914, 88.0972
- ready mixed concrete origins, 88.0802
- Roman concrete under water, Caesarea, 88.0054
- tilt-up method development, 88.0475
- tunnel construction under Chicago, 1900, 88.0512
- Usonian Automatic system, designed by F. L. Wright, 88.1028

Hofmann Tower, historic structure, Lyons, Illinois, 88.0208

Hot weather concreting, curing needs, 88.0743

Houses

- exposed aggregate for desert home, 88.1024
- geodesic dome, polystyrene and concrete, 88.1018
- urethane-plus-wire panel shapes wall, covered with concrete, 88.1055
- Usonian Automatic in traveling exhibit, 88.1028

I

Inflated forms

- arch bridges and culverts, 88.0385
- chimney lining, 88.0395

(more)

**The Valve
Is the Difference...**

**It's Not a Swing Tube
It's Not a Rock Valve
It's Olin's All-New, Patented
One-Piece "Slide-Valve"**

world of '89
concrete
Booth 4615



Five Models with Outputs from 40 to 140 Cubic Yards Per Hour

- Smooth Delivery
- Able to Pump Mixes Containing High Fines, Without High Wear
- Able to Pump Mixes Containing Up to 1 1/2" Aggregate

The smooth delivery of even harsh, low slump concrete is a direct result of the efficiency of the patented one piece "slide-valve" and is achieved without complicated closed loop hydraulic systems.

You get these and many other features, along with Olin's exclusive 3-year/3000 hour limited warranty.

Seeing is believing. Call or write the factory for a free video.

Performance, not promises...that's Olinpump

Olin Engineering, Inc.
11651 Markon Drive
Garden Grove, CA 92641

OLINPUMP

Phone Inside CA 714/897-1230 ▪ Outside CA 800/372-PUMP ▪ FAX 714/892-9268

circle 355 on reader service card

We can't keep it under our hats any longer!




FOSROC INC. ... The new leader in construction chemicals.

- Repair
- Sealants
- Anchoring
- Adhesives
- Accessories
- Grouts
- Flooring
- Coatings
- Admixtures
- Retarders

We've joined forces, and a new leader has emerged! Preco Industries Ltd. and Celtite Chemicals Division are now FOSROC INC., the **one** source for all of your construction chemical needs.

To learn how FOSROC INC. has combined the best in construction chemicals to serve contractors, engineers, precasters and architects, visit us at booths 575 and 1510 at the World of Concrete Show, or call Toll Free: 1-800-645-3954, in NY 516-935-9100.

world of '89
concrete USA
Booth 575



FOSROC INC.
55 Skyline Drive, Plainview, NY 11803

circle 113 on reader service card

design and construction, **88.0403**
dome

lift wet concrete and steel, **88.0407**
shotcreted and post-tensioned,
88.0389

dome of foam plus shotcrete, **88.0391**
opportunities for contractor, **88.0382**
support dry mix between fabric layers,
88.0405

Insulating foam blankets, winter use,
88.1036

Insulation, umbrella over earth,
residential construction, **88.0399**

Insurance costs, concrete construction
reduces, **88.0481**

Iowa low slump concrete, bridge deck
overlay, **88.0110**

J

Joint sealants, industrial floor needs,
88.0749

Joints

construction for buildings, requirements
and detailing, **88.0577**

floor slab

industrial requirements, **88.0749**

industrial, epoxy filled, **88.0783**

parking lots, design considerations,
88.0663

pavement, both grooved and sawed,
88.0415

residential flatwork, errors cause
cracking, **88.0770**

saw cut

industrial floors, **88.0749**

minutes after finishing, **88.0336**

K

Kahn, Albert, industrial architecture in
concrete, **88.0152**

L

Landscaping

color enhances concrete appeal,
88.0853

concrete rocks for jungle pool, **88.0693**

driveways a key feature, **88.0858**

driveways of grass plus concrete,
88.0863

market opportunity for concrete,
88.0828, 88.0848

Laser Levels

accuracy attainable with, **88.1015**

calibration method, **88.1015**

how to use, **88.1015**

Latex modified concrete

bridge deck overlay, **88.0110**

epoxy coated bars in, **88.0216**

high early strength, mix design for,
88.0831

high early strength, properties
evaluated, **88.0831**

mixing/placing methods, high early
strength, **88.0831**

plastic shrinkage cracks in overlays of,
88.0672

Latex modified grout, bridge deck
resurfacing, **88.0362**

Layout, construction site, laser levels for,
88.1015

Levels, laser system operation, **88.1015**

Liability Insurance, rates rise for
engineers, **88.0364**

Lift slab, OSHA regulations, **88.1079**

Lifting, correct practice prevents back
injury, **88.0949**

Lighthouse, Brandywine Shoe:,
rehabilitation, **88.0659**

Lightweight aggregate concrete

finishing with air screed, **88.0492**

mix design for pumping, **88.0492**

pumping for 42-story building, **88.0492**

(more)

CLARK



Portable™
Concrete Conveyor

**The lightweight solution
to your heavyweight problems.**

CONSIDER THE ADVANTAGES:

***Low Price**—All models sell for
under \$5,000.00.

***Simple to Operate**—One con-
trol varies belt speed to ac-
commodate high or low slump
concrete.

***Lightweight**—All models are
constructed of high strength
aluminum alloys.

***Low Operation Costs**—Our
patented design dramatically
reduces moving parts.

***High Productivity**—Up to 50
cubic yards per hour can be
expected.

***Easy To Transport**—All models
can be transported on a 12
foot pickup ladder rack.

***Versatility**—With 15 models to
choose from and lengths up to
30 feet the need for costly
pumps, cranes and large con-
veyors is greatly reduced.



Don't struggle with your next pour

call us!

1-800-456-POUR


Dealer Inquiries Invited.

world of '89
concrete USA
Booth #022

CLARK

P.O. Box 309, Cloquet, MN 55720, (218) 879-9029
MACHINERY, INC.

circle 158 on reader service card

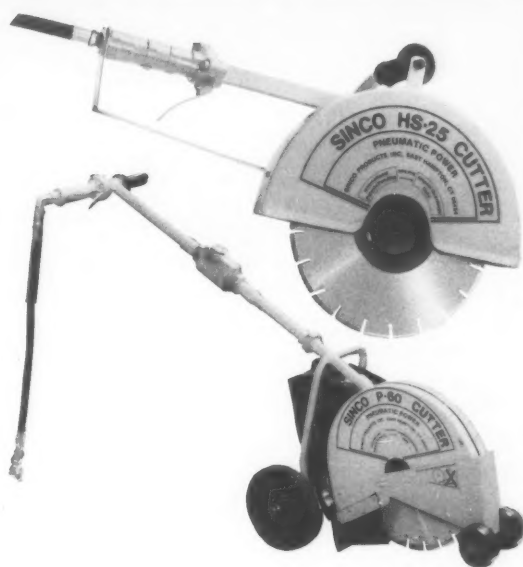

Sinco's New Air Powered Dry Cutting Concrete Saws have a life expectancy measured in years, not hours!

Sinco's New Air Powered Saws Last More than 4 Times Longer Than Conventional Gasoline Saws

Sinco's new Air Powered Concrete Cutting Saws – the Hand-Held HS-25 and the Walk-Behind P-60 – represent the latest development in concrete cutting technology. These new saws are specifically designed and built for dry cutting. The Sinco HS-25 and P-60 develop the necessary high RPM's for fast dry blade cutting and will significantly increase the life of a dry diamond blade.

High Performance and Low Maintenance Costs

The Sinco HS-25 and P-60 are air powered. All you have to do is attach the saw to a compressor air hose and keep the automatic oiler filled. The oiler is provided as standard equipment. There is no gas line or carburetor to get clogged, no air filter to clean, no spark plug to foul, no pistons to get gummed up by dust and debris. And believe it or not, there's minimal required maintenance.

The Sinco Hand-Held HS-25 and Walk-Behind P-60 Air Powered Saws have a life expectancy that really can be measured in years, not hours.

Compare Benefits

The HS-25 Hand-Held Air Powered Saw

- **Cuts Dry** – specifically designed for dry blades
- **Direct Drive** – for maximum power, no belts, pulleys or chains to drain horsepower or break
- **Use Indoors or Out** – no engine exhaust or pollutants
- **4 HP Air Motor** – powerful state-of-the-art technology and virtually maintenance free
- **4800 RPM Working Speed** – the best RPM's for dry cutting blades – increases blade life and speed of cut
- **Lightweight** – only 22 lbs. plus blade
- **Dead Man Type Hand Throttle** – safe and reliable
- **Minimal Maintenance Schedule** – economical operation and long life

The P-60 Walk-Behind Air Saw

- **Cuts Dry** – specifically designed for dry blades
- **Direct Drive** – for maximum power, no belts, pulleys or chains to drain horsepower or break
- **3.6 HP Air Motor** – powerful state-of-the-art technology and virtually maintenance free
- **4800 RPM Working Speed** – the best RPM's for dry cutting blades – increases blade life and speed of cut
- **Lightweight** – only 50 lbs. plus blade
- **Dead Man Type Hand Throttle** – safe and reliable
- **Adjustable Cutting Depth** – up to 4" with a 14" blade
- **Dust Suppressor** – an atomizer sprays water – keeps dust to a minimum
- **Handle Rotates 90°** – allows cuts within 1" of wall
- **Detachable Handle** – easy to transport, saw fits in car trunk
- **Minimal Maintenance Schedule** – economical operation and long life

world of '89
concrete USA
Booth 769

For more information, contact:

Sinco brings concrete cutting technology into the 21st century.



SINCO Products Incorporated

One SINCO Place, P.O. Box 361, East Hampton, CT 06424
(203) 267-2545 FAX: 1-203-267-4976 Telex: 510-100-8030
Sales and Service: 1-800-634-4079, Technical Hot Line: 1-800-243-6753

Living Room Suite, sculpture by Michael Wolk, 88.0876

M

Magazines in concrete field, cement research quarterly started, 88.0526

Marketing

basement promotion, 88.0467
parking lot promotion, 88.0459
subcontractor services, 88.0184

Masonry construction safety, OSHA regulations, 88.1079

Mass concrete

cooling with liquid nitrogen, crack prevention, 88.1032
mix design, 88.1032
scheduling and placing, foundation mat, 88.1032

Mediation, contract disputes settled by, 88.0190

Microsilica

See also Silica fume
effect on durability, 88.0706
shotcrete repair additive, 88.0018
used in bridge deck overlay, 88.0110

Microsilica concrete, early strength, 88.0619

Mix design

exposed aggregate concrete, 88.0215
latex modified concrete, high early strength, 88.0831
lightweight aggregate concrete, pump placement, 88.0492
mass concrete, to control cracking, 88.1032
pea gravel concrete, 88.0787
roller compacted concrete pavements, 88.0013

Mixers, shotcrete wet mixed on site, 88.0330

Modal analysis, dynamic behavior of structures, 88.0048

Modulus of elasticity, significance explained, 88.0951

Moisture measurement, floor slabs before topping, 88.0786

N

Negotiated work, advantages over bid system, 88.0590

Nitrogen (liquid), cools mass concrete to prevent cracking, 88.1032

Nondestructive testing

corrosion detection, computer-aided half cell, 88.0757
laboratories listed, 88.0056

O

Olympic Oval, constructed with precast prestressed concrete, 88.0778

Opportunities in Concrete series
inflated forming methods, 88.APR
(9 articles)

landscaping with concrete, 88.SEP
(4 articles)

Ornamental concrete products, aluminum molds for, 88.0351

OSHA

hazard communication standard, 88.0616
proposed revision published, 88.0896
revised rules for concrete construction, adopted 1988, 88.1079
rules for cranes near power lines, 88.0416

Overlays

basement slab, curling prevention, 88.0510
bonding to old concrete, 88.0676
lowa low slump concrete, 88.0110
latex modified concrete, high early strength, 88.0831
pavement
charged for area plus volume, 88.0415

(more)



Mix and pump a bag-a-minute! One man continuous-batching of non-shrink & sanded grouts.

System Advantages.

- ... mixes and pumps non-shrink, sanded grouts, cement or sand/cement
- ... superior mixer is designed for fast, thorough mixing.
- ... mixer speed and efficiency enable the 34 gallon (4 bag) mixer-tank, hopper and pump to work as a "balanced system"—mixing stays ahead of pump output.
- ... one operator performs all mixing and pumping, saving the cost of two or three laborers.
- ... cleans up with a water flush.

The Pump.

- ... positive displacement air-powered piston pump.
- ... delivers one bag per minute (5 gpm) under pressures to 225 psi.
- ... three wetted working parts and quick disconnect couplings offer easy maintenance/servicing without tools.

Field-Proven Applications. Use the CG-550P to grout machine bases... precast units... in post tensioning... hollow doors/windows

- ... concrete patch dowels... voids... for water-proofing... and much more.

Quick Delivery.

To rent or purchase, call 312-354-7125.

CG-550P Grout Pump & Mixer

P.O. Box 1140-S, La Grange Park, IL 60525,
312-354-7125, FAX: 312-354-3881 • Chicago, IL
York, PA • Atlanta, GA • Houston, TX • Salt Lake, UT

ChemGrout


"Widest Selection of Grouting Equipment in the World"

circle 155 on reader service card



Meet the Cushion Cut family of Groovers and Grinders

NO OTHER COMPANY GIVES YOU A CHOICE LIKE THIS

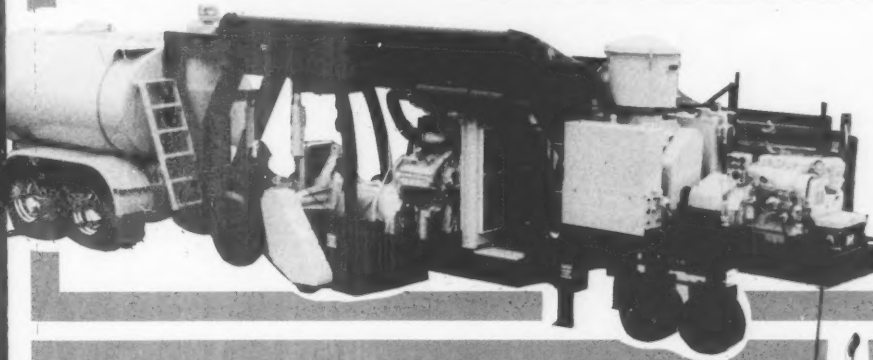

PC-5000 Highway Grinder

The high performance PC-5000 allows large production highway grinding with an excellent profile. Carries its own on-board water supply. This 40 foot unit requires only a single operator. Carried to the job-site like a semi-trailer, it sets up in less than 15 minutes.

PC-390 Groover/Grinder

The new 14 foot PC-390 is designed for high production pavement grooving, continuous highway grinding, and bump grinding. This rugged unit incorporates some of the latest features to make the work move smoothly and efficiently.



HG-130A Groover/Grinder

Versatile and compact, the eight foot long HG-130A can be used for intermediate duty grooving, grinding, and bridge deck transverse grooving applications. It's a highly mobile unit capable of turning around in its own length.



HP-6530 Pavement Groover

This compact, heavy duty pavement groover is ideally suited for bridge deck grooving and similar applications. Powered by a 65 horsepower Wisconsin Engine, it will groove up to a 30 inch width.

**Count on Cushion Cut for Diamond Blades • Core Bits •
Core Drills • Concrete Saws • Groovers • Grinders**

**world of '89
concrete USA
Booth 1953**

CUSHION CUT

CUSHION CUT, INC. • 2565 West 237th Street • Torrance, Calif., U.S.A. 90505 • (213) 325-5702 • Toll-Free (800) 421-2222 • Telex No. 181909 Cush Cut

circle 168 on reader service card

CONCRETE CONSTRUCTION SUBJECT INDEX: 1988 continued

fast track work evaluated, **88.0194**
joints both grooved and sawed, **88.0415**
performance in Ohio, **88.0366**

P

Parking decks

condition appraisal, **88.0097**
cracking due to shear overload, **88.0924**
maintenance program, **88.0097**
repair program, **88.0097**
shear collars installed on columns, increase load capacity, **88.0924**

stair-elevator tower, curved beams site precast, **88.0921**

Parking lots

ACI guide for design and construction, **88.0663**
advantages of concrete over asphalt, **88.0459**
design considerations, **88.0663**
jointing practices, **88.0663**
promotion tips, **88.0459**
whitewashing demonstration (Kentucky), **88.0785**

Pattern stamped concrete, helps market residential flatwork, **88.0858**

Pavements

bond issue funding favors concrete, **88.0501**
computerized design to AASHTO standards, **88.1092**
D-cracking, causes and prevention, **88.0845**
design to prevent cracking, **88.0077**
design with roller compacted concrete, **88.0013**
dowel bars, epoxied in for repair, **88.0188**
grass grows in formed voids, **88.0863**
life cycle cost analysis, computer aided, **88.1092**
overlay performance in Ohio, **88.0366**
pattern stamped in 1914, **88.0972**

Paving

recycled concrete used as aggregate, **88.0320**
roller compacted concrete, installation and mixes, **88.0013**
slope, with expanded metal backform, **88.0839**

Pea gravel, mix design using, **88.0787**

Peace Bridge, intercontinental, proposed by Lin, **88.0587**

Perlite concrete, dry mix between fabric layers, placed over inflated form, **88.0405**

Petrographic analysis, laboratories listed, **88.0056**

Pipe

design manual issued, **88.0616**
manufacturing method, eliminates wire wrap, **88.0713**
precast prestressed manufacture and installation, **88.0790**
record sizes used in Arizona, **88.0790**

Placing booms, detachable, moved by crane, **88.0582**

Placing methods

helicopter and bucket, **88.0233**
pumping aided by placing booms, **88.0582**

Plastic shrinkage cracking, latex modified concrete overlay, prevention, **88.0672**

Plywood

bending for formwork, **88.0007**
modular shells form multistory building, stay in place, **88.0708**

Polymer concretes

bridge deck overlays, **88.0110**
FHWA performance study, **88.0362**

Polymer grids, reinforce concrete, **88.0776**

Polypropylene foam, insulating blankets for construction, **88.1036**

Post-tensioned slab, anchorage performance during collapse, L'Ambiance Plaza, **88.0974**

WATERPROOF

AquataPoxy™ solves wet and dry coating and patching problems



AquataPoxy™ coatings and patching gels are so remarkable they can actually be applied directly *under water*. Leaks can be repaired while water containment structures are in service. Downtime is dramatically reduced.

AquataPoxy chemically displaces water on submerged surfaces to create a tight bond that dries hard, durable, and waterproof. AquataPoxy is non-polluting, non-toxic and USDA and EPA accepted. It resists common acids, bases, solvents, & oils. AquataPoxy. At work today in

world of '89
concrete USA
Booth 3102

clarifiers, salt and fresh water vessels, potable water tanks, canal linings and breakwaters, pipelines, offshore drilling rigs, waste-water treatment plants...around the corner and around the world. AquataPoxy helps solve your difficult coating and patching problems. Waterproof. Water proven. Call or write today for free literature.

Specialty Coatings. Proven Safe. Proven Effective.

American Chemical Corporation

35555 Curtis Blvd. • Eastlake, Ohio 44094 • (800) 634-1441

circle 131 on reader service card

Post-tensioning tendons

electrical isolation, 88.0668
sheathing and anchorage details, 88.0668
unbonded, details to prevent corrosion, 88.0668

Powder actuated fasteners, spalling problems with, 88.0786

Power plant sump, repair with shotcrete, epoxy, 88.0018

Prata, Ralph, sculptures in concrete, 88.1192

Precast concrete

curved beams on site, stair tower construction, 88.0921
erection methods, girders slide into place, 88.0176
installation by roof-mounted crane, 88.0699
lighthouse restored with, 88.0659
sculpture, *Living Room Suite*, 88.0876

Precast panels

permanent form for slabs, 88.0266
wall footings cast around base, 88.0319

Precast prestressed concrete, Olympic Oval construction (Calgary), 88.0778

Preheating, rebars and inserts before welding, 88.1077

Preplaced aggregate concrete

aggregate placing, saturation, 88.0643
grout requirements, 88.0643
pumping grout for, 88.0643
use for repairs, 88.0643

Pumice, reactive with alkali? 88.0354, 88.1102

Pump lines, ball valve pumps, 88.0145

Pumping

cost per yard, 88.0077
crane moves booms to various positions, 88.0582
lightweight structural concrete, 88.0492
system layout, tight site for high-rise, 88.0492

Pumps, ball valve, features and operation, 88.0145

Q

Quality standards, constructed projects, ASCE manual on, 88.0899

R

Radiant heating systems, information source, 88.0789

Radius forming methods, 88.0007

Raffles City, hotel sets height record, 88.0886

Rain, damage to fresh slabs, repairing, 88.0349

Ramps, spiral, formwork for, 88.1007

Ready mixed concrete

history of development, 88.0802
stabilizer delays hydration, permits later use, 88.0502
washout water salvaged with stabilizer, 88.0502

Record setters

City Spire, 810 feet in New York, 88.0486
prestressed pipe on Colorado River job, 88.0790
tallest concrete building set for 1990, 88.0429
tallest hotel, Raffles City, 88.0886

Recycled concrete

crushing operation, 88.0320
pavements, removal process, 88.0320
stabilizer holds ready mix for later use, 88.0502
used as aggregate, 88.0320

Reinforcement

glass-fiber-reinforced plastic, 88.0110
polymer grids for crack control, 88.0776

Reinforcing steel


bars
bond improved with black iron oxide, 88.1191

(more)

One size does not fit all.

All concrete mixes and aggregate sizes are not the same. Fibrous reinforcement should reflect the differences.

Tests have shown that the longest fiber possible should be used for a

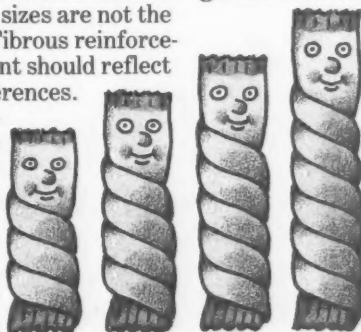

given mix. FORTA™ CR®

comes in four lengths, ranging from ¾" to 2½". FORTA CR — optimum length for optimum performance.

1-800-245-0306
1-800-222-8907 PA ONLY

FORTA CORPORATION
Think FORTA First.

Visit our Booth #4062 at
World of Concrete '89

CONCRETE CONSTRUCTION SUBJECT INDEX: 1988 continued

epoxy coated, 88.0110
galvanized, 88.0110
grade 75 reinstated, 88.0520
preheat before welding? 88.1077
stainless steel, 88.0110
strength above 72 ksi, 88.0950
corrosion resistant, 88.0110
cover needed to prevent corrosion, 88.0110
grade 75 specifications, 88.0950

Repair. See also Restoration
architectural concrete, matching color and texture, 88.1096
board marked finish, 88.1096

bonding new concrete to old, 88.0676
chimney lining with inflated form, 88.0395
contract and specifications for, 88.0097
curing requirements, 88.0676
epoxy materials, value questioned, 88.0424
lighthouse at Brandywine Shoal, 88.0659
materials and methods, floor slabs, 88.0097
parking structures
cost estimates, 88.0097
materials and methods, 88.0097
preparing surfaces for, 88.0676

preplaced aggregate methods, 88.0643
shear collars installed on columns, strengthen slab, 88.0924
shotcrete for bridge counterweight, 88.0330
shotcrete for power plant sump, 88.0018
surface preparation for, 88.0018, 88.0643
tunnel leaks, urethane foam injection, 88.1073

Residential construction

castle wins award, 88.0718
exposed aggregate, desert home, 88.1024

flatwork

curing, jointing errors, 88.0770
how to prevent cracking, 88.0770
geodesic dome of polystyrene and concrete, 88.1018
inflated forms for dome modules, 88.0395
urethane plus wire panels, concrete encased, 88.1055

Restoration. See also Repair

glass-fiber-reinforced concrete used, historic facade, 88.0196

Retaining walls, crib type, landscape planting in, 88.0848

Robbie Stadium, spiral ramp construction, for Miami Dolphins, 88.1007

Rock formations, simulated in GFRC, 88.0693

Roller compacted concrete

pavements
design for streets, highways, 88.0007
economical job size? 88.0609
installation practices, 88.0013
mix proportions for, 88.0013

Roman cement and concrete, under water at Caesarea, 88.0054

Roof systems

installation materials and methods, 88.0160
precast prestressed arches, support Olympic Oval, 88.0778
which one to use over concrete, 88.0160

Roofs, membrane materials, flat concrete, 88.0160

Rust stain, prevented by adequate cover over steel, 88.0212

S

Safety

boomed vehicles near power lines, 88.0416
corporate programs focus on workers, 88.0683
fire danger reduced with concrete, 88.0481
handbook for new workers, 88.0683
lifting correctly reduces back injuries, 88.0949

We Are Building All Across America



MIGHTY[®] Superplasticizers

Mighty is Mightier Than Ever!

For information, samples or literature, call or write:

BOREMCO[®] Specialty Chemicals

106 Ferry Street • P.O. Box 2573 • Fall River, MA 02722
TELEX 948-626 • FAX (508) 672-5670 • Tel. (508) 675-0181
TOLL FREE 1-800-922-2933 • In Mass. (800) 422-0204

world of '89
concrete USA
Booth 1974

circle 145 on reader service card

OSHA requirements, revision adopted 1988, 88.1079

program to reduce accidents, statistics on effectiveness, 88.0357
workers during formwork operations, 88.0303

Safety factors, anchorage systems, 88.0354

Sawing

joints cut minutes after finishing, 88.0336
joints in industrial floors, 88.0749
lightweight thinner saw, cuts joints soon after finish, 88.0336

Scheduling of construction, part of management information system, 88.0170

Scoria, reactive with alkali? 88.0354

Screeds

air powered, lightweight aggregate concrete, 88.0492
power, straddle protruding rebar, 88.0807

Sculpture

abstract by Prata, 88.1192
book reports 100 works of art, 88.0610
Living Room Suite, by Michael Wolk, 88.0876
Olson book available, 88.0522

Shear collars, added to columns, increase slab capacity, 88.0924

Shear wall construction, joint requirements, 88.0577

Shoring

flying assembly for spiral ramp, 88.1007
OSHA regulations, 88.1079
safety considerations for workers, 88.0303

Shotcrete

air entrainment recommended, 88.0606
culverts and bridges, over inflated form, 88.0365
curing methods, 88.0743
dome construction with insulating foam, 88.0391
dome home with inflated forms, 88.0399
dome with inflated form, post-tensioned, 88.0389
dry mix repairs for power plant sump, 88.0018
freeze-thaw durability, 88.0606
repair of bridge counterweight, wet mix equipment, 88.0330
wet mix equipment for bridge counterweight repair, 88.0330

Side form spacers, prevent rust stains, 88.0212

Silica fume. See also Microsilica
high strength concrete, effect on freeze-thaw durability, 88.0344

Silica fume concrete, cover needs for rebar, 88.0696

Slab on grade

curling
caused by vapor barrier? 88.0424
prevention in toppings, 88.0510
vapor barrier effect, 88.0079
joint spacing recommendations, 88.0952
jointing for industrial use, 88.0749
jointing practices, 88.0695
joints, epoxy filled, 88.0783
settlement corrected by slabjacking, 88.0651

Slab topping, prevention of curling, 88.0510

Slabjacking

equipment needs, 88.0651
repair of settled slabs, materials, methods, 88.0651

Slabs

framing schemes, advantages outlined, 88.0408
preliminary design, choice of framing system, 88.0408

Soil conditions, industrial floor requirements, 88.0137

Specialty contractors, choosing and paying, 88.0870

(more)



8800-square-foot warehouse floor leveled with ARDEX K-500 at ½ inch depth in one morning.

New floor in one morning— flat!

world of '89
concrete USA
Booth 4455



Minimize downtime with ARDEX K-500 self-leveling, pumpable concrete topping!
ARDEX K-500 Self-Leveling Concrete Topping can be easily installed manually with a three-man crew, or pumped on large jobs with the ARDEX Levelcraft Automatic Mixing Pump. Just pour or pump and spread ARDEX K-500 from ¼ inch to 1½ inches in one application.

No troweling required! ARDEX K-500 levels itself automatically...can be walked on in 3 hours, coated in 24 hours, and driven over in 48 hours!

ARDEX K-500 has a compressive strength of 5300 psi. It is ideal for warehouses, garages, and utility areas—for new construction or renovation, on or below grade. For technical data and local availability, contact ARDEX, INC., 630 Stoops Ferry Road, Coraopolis (Pittsburgh), PA 15108; phone (412) 264-4240.

Flatly Superior.

circle 137 on reader service card

Spiral ramp, formwork for, Dolphins' Stadium, **88.1007**

Sprinklers. See Fire resistance, Fire protection

Stabilizer, delays ready mix hydration, saves washout water, **88.0502**

Stadium construction, spiral ramps, Dolphins' Stadium, **88.1007**

Stains

chemical, color concrete, **88.0853**
rust prevented by adequate steel cover, **88.0212**

Stratiform construction, shotcreted dome, inflated forms, **88.0391**

Structural design

high-rise construction
slenderness ratio, City Spire, **88.0486**
tips for cutting cost, **88.0453**
modular tilt-up saves money, **88.0508**
preliminary, choosing the framing system, **88.0408**

Structural movement, modal analysis technique, **88.0048**

Subcontractors

marketing of services, **88.0184**
specialized terminology explained, **88.0200**

Subgrade preparation, industrial floors, **88.0137**

Sunshine Skyway Bridge, design significance, **88.0023**

Superplasticizers, high strength concrete, effect on freeze-thaw durability, **88.0344**

T

Terminology, construction term dictionary by NAWIC, **88.0429**

Test cylinders

improper handling affects strength, **88.0939**

length-diameter ratio affects strength, **88.0034**

Test methods

corrosion measurement, computer-aided half cell device, **88.0757**

errors influence strength results, **88.0939**

modal analysis, dynamic structural behavior, **88.0048**

moisture measurement in floor slabs, **88.0786**

parking deck evaluation, **88.0097**

reporting requirements, ASTM and others, **88.0939**

technician needs training to perform, **88.0939**

Testing laboratories, listed by states, **88.0056**

Testing services, specialized evaluation, classified list, **88.0056**

Tie wires and tying, reinforcing steel, **88.0250**

Tilt-up

crane time, how to minimize, **88.0475**

edge forms of metal, **88.0077**

erection procedure, stack cast panels, **88.0765**

forms for stack casting, **88.0765**

history of development, **88.0475**

marketing advantages, **88.0475**

stack casting, planning construction cycle, **88.0765**

standardized modular buildings, reduce cost, **88.0508**

trompe l'oeil panels, **88.0348**

Tools. See Sawing; individual tool by name

Transportation systems, funding, national policy needed, **88.0605**, **88.0880**

Transporting concrete, helicopter with bucket, **88.0299**

FROM THE MAKERS OF MAXI-LITE and SUNDOWNER LIGHT TOWERS

MODEL 6600 MAXI-SWEEP

HYDROSTATIC SELF-PROPELLED SWEEPER



A fourth generation sweeper
with a host of features that
leaves the others in the dust.

View the line at World of
Concrete Booth #3481

MAXI-LITE

SUNDOWNER 1800



**Allmand
Bros. Inc.**

WANT MORE INFORMATION? CALL 1-800-426-5004
OR FAX SPECIES TO (308) 995-4495

P.O. BOX 546 • Holdrege, Nebraska 68949 USA
Phone (308) 995-4495

Trap rock, floor aggregate, 88.0946

Trompe l'oeil, tilt-up panels, 88.0348

Tunnel construction

leaks repaired with injected urethane, 88.1073

methods for Chicago telephone system, c. 1900, 88.0512

U

Underlayments, self-leveling eliminates curling, 88.0792

Underwater concreting, historic Roman work, Caesarea, 88.0054

Urethane coatings, peeling on floor slabs, causes, 88.1038

Urethane foam

injection procedures, 88.1073

repairs leaking tunnel, 88.1073

Urethane insulation, panels with wire mesh, concrete coated, 88.1055

Usonian Automatic construction

Frank Lloyd Wright design, history, 88.1028

house in traveling exhibit, 88.1028

V

Vacuum drills, dust removal during cutting, 88.0527

Vapor barrier, cause of slab curling? 88.0424

Vibration, compressive strength influenced by, 88.0563

Vibration techniques, recommended procedures, 88.0563, 88.0793

Vibrators

internal

how to choose, 88.0563

how to use, 88.0563

types available, 88.0563

W

Wall forms, curved, construction methods compared, 88.0007

Walls, precast panel, footing cast around base, 88.0319

Washout water, salvaged with chemical stabilizer, 88.0502

Wastewater, acid attacks concrete, 88.0873

Water-cement ratio, effect on durability, 88.0222

Water jet, cuts concrete, 88.0806

Waterproofing, membrane stops bridge deck corrosion, 88.0268

Welding requirements, reinforcing steel, when to preheat, 88.1077

Whitertopping

demonstration in Kentucky, 88.0785

Ohio job charges for area and volume, 88.0415

Wolk, Michael, Living Room Suite sculpture, 88.0876

Wood basements, deficiencies reported, 88.0457

Worker safety, formwork operations, 88.0303

World of Concrete®

1988 statistics, 88.0326

1989 seminars, 88.1040

demonstrations for 1988, 88.0074
how to use time there effectively, 88.1100

World of Concrete Europe

1987 report, 88.0168

deminar program 1988, 88.1048

Wright, Frank Lloyd

exhibit features ideas, 88.1028

Usonian Automatic system, 88.1028

Everything Concrete

See Us At WOC Booth 4668



Elba Parts

PCEC, Parsons Concrete Equipment Company, is your exclusive supplier of genuine Elba parts. Elba parts are durable, precision-made and built for the long haul. And we have parts for all models in stock. Call about our monthly specials.

PCEC is also bringing you the Hornet line of Trzler-Mounted Concrete Pumps. They're 30-90 cu. yd./hr. mid-weight pumps with a heavy-weight punch.

What's more, PCEC is your

PCEC Staff



single source for sensational Elba Batch Plants. Whether you use Elba Batch Plants for concrete products, ready-mix operation, or on-site, the economic advantages can be terrific.



Concrete Plants

In addition, PCEC is the U.S. supplier of SBS Gunite Machinery. This equipment represents the greatest advancement in dry shotcreting in the past 25 years.



SBS Concrete Spray Systems

PCEC, Box 241146, Charlotte, NC 28224, Fax: 704/523-7922



Hornet Concrete Pump

It produces high-strength concrete in place with minimum rebound waste and maximum dust control.

To find out more about PCEC products and the service that backs them up, just call us at 704/527-3481.

PCEC. Your source for concrete solutions.



Parsons Concrete Equipment Company

704/527-3481